


Section A-A

Rated to continuous flow of 1600 litres per day. Up to 2000 litres per day for intermittent use.

Lid thickness standard at 80mm. Recommended maximum loose soil cover depth - 400mm

Light Trafficable and heavy duty lids with cast iron frame and grates are available to order.  
Contact Austin Bluewater technical department.

TANK Weight - including 80 mm lid = 8.2 tonne  
Lifting - 4 number Reid 2.5 t eye anchors When handling an equalising beam must be used to ensure equal loading to all lifting anchors

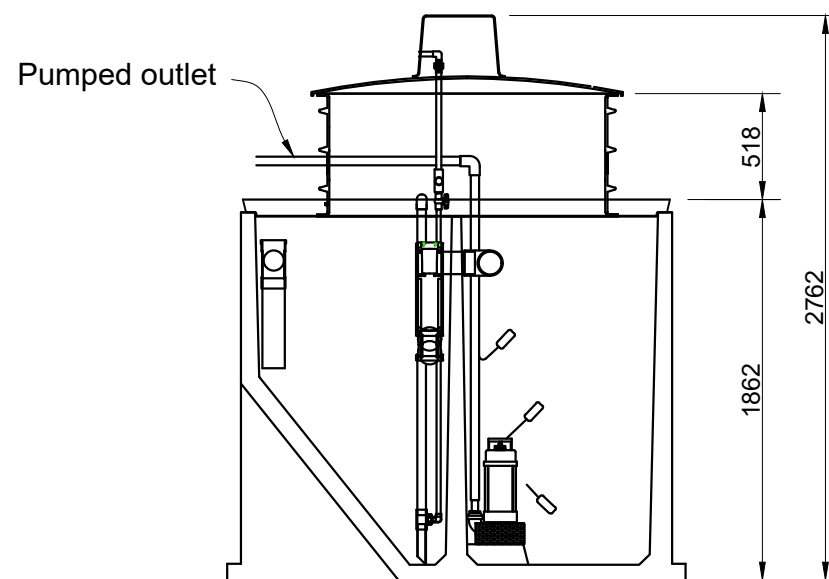

Section B-B